

Item #_


STANDARD FEATURES

- Stainless steel front, galvanized sides
- Cast iron open burner, each 30,000 BTU/hr
- Thermostat (250° F- 550° F) controlled oven
- ► Welded frame structure for best stability
- >24" griddle plate(3/4" thickness) with splash guard
- ► Adjustable heavy duty legs
- >12" x12"(30x30cm) cast iron grate
- ≻Anti-clogging pilot cover under the grate
- ightarrow A pull-out crumb tray with angled handle in the front
- ►U shape oven burner with 31,000 BTU/hr
- ➤Thermal coupling safety valve for the oven
- > Stainless steel oven door with good insulation
- Stainless steel handle for bottom oven
- ≻Kick plate at the bottom, easy access for servicing
- >3⁄4" NPT rear gas connection



Model: ER-2-24G



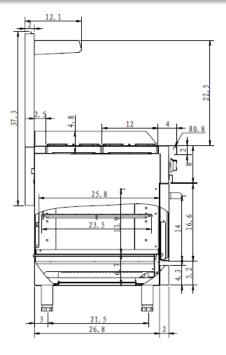

Model	Description	Total BTU/HR	Packing Size(IN)	N/W (LB)	G/W (LB)
ER-2-24G	Gas range with 24" griddle& oven	131,000	41x40x52	403	507

ENHANCED

Enhanced Cooking Equipment 2610 E. Woodward Ave. Fresno, Ca. 93721 (720)309-1902

Intertek Intertek